

FIG. 3

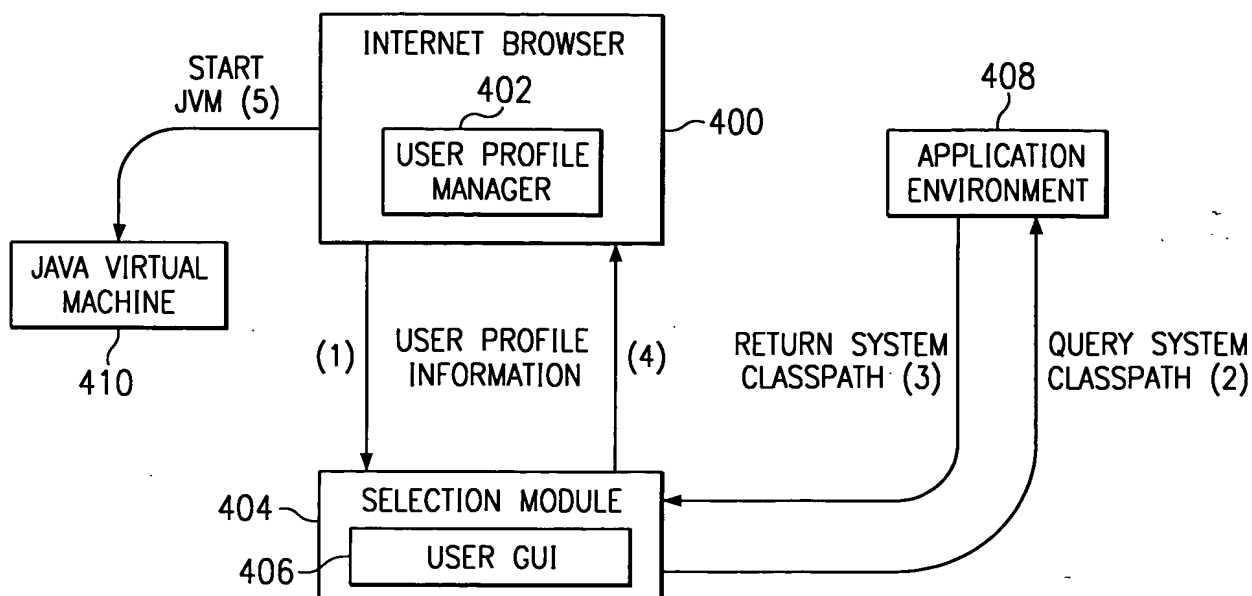


FIG. 4

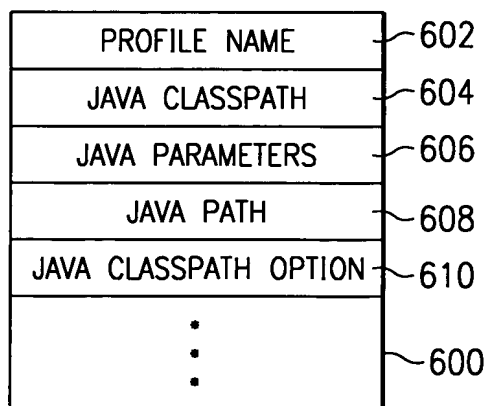


FIG. 6

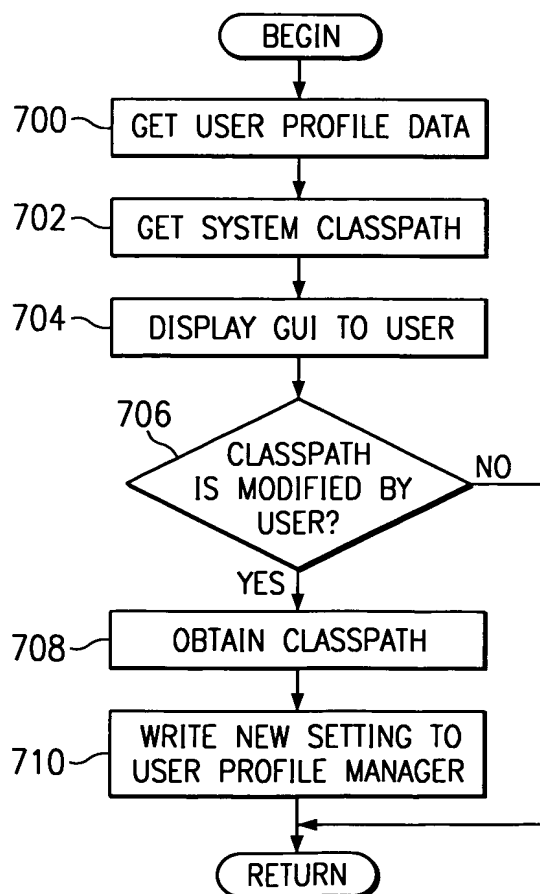


FIG. 7

IBM Java advanced properties

WARNING: Modifying these properties will change the behavior of JAVA within the browser.

Java Path
Enter the Path of the Java executable (JVM) to be used
C:\Java11\dl\javai.dll Browse

Java Options
Enter optional Java parameters:
List of Options


Java Classpath
☐ Ignore System Classpath
Enter optional classpath
c:\swing-1.0.2\swingall.jar

☒ Ignore changes to classpath
☐ Append to the beginning of the system classpath
☐ Append to the end of the system classpath

Current Classpath
The following is the current classpath
d:\ns\config\os2\ibmjrt1.x\lib\nj3240.zip:d:\ns\config\os2\ibmjrt1.x\lib\jil3240.zip:c:\java11\lib\clas

OK Cancel

FIG. 5

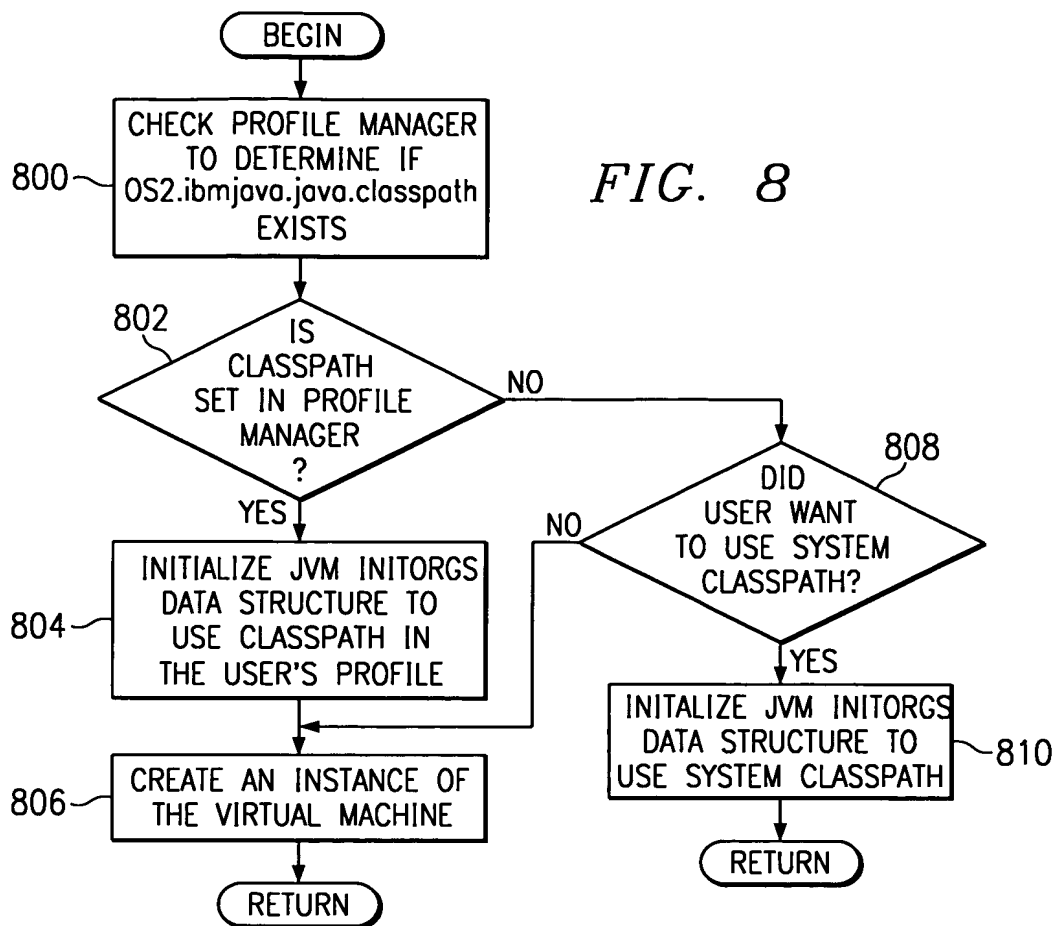

JDK1_1InitsArgs Fields

JVM Initialization Data Structure

Field Name	Java Flag	Description
nativeStackSize	-ss	Max Stack Size for native threads
javaStackSize	-oss	Max Stack for any JVM thread
minHeapSize	-ms	Initial heap size
maxHeapSize	-mx	Maximum heap size
verifyMode=0	-noverify	Do not verify byte code when loading
verifyMode=1	-verifyremote	verify byte code only when loading remotely
verifyMode=2	-verify	verify loading of all byte code
classpath	-classpath	Local directories for loading classes
enableClassGC	-noclassgc	Enable/disable class garbage collection
enableVerboseGC	-verbosegc	Enable reporting of garbage collection
disableAsyncGC	-noasyncgc	Disable asynchronous garbage collection
verbose	-verbose of -v	Reports JVM information, including all class loads
debugging	-debug	Allow remote debugging of JVM

FIG. 9